

# Modeling radiation in particle clouds: on the importance of inter-particle radiation for pulverized solid fuel combustion

Nils Erland L. Haugen · Reginald E. Mitchell

Received: 25 April 2014 / Accepted: 4 December 2014 / Published online: 16 December 2014  
© Springer-Verlag Berlin Heidelberg 2014

**Abstract** The importance of inter-particle radiation for clusters of gray and diffuse particles is investigated. The radiative cooling of each individual particle is found to vary strongly with its position in the cluster, and a “mean” radiative particle cooling term is proposed for single particle simulations of particle clusters or for high detail simulation, like Direct Numerical Simulations of small sub-volumes of large clusters of particles. Radiative cooling is shown to be important both for furnaces for coal gasification and coal combustion. Broadening the particle size distribution is found to have just a minor effect on the radiative particle cooling. This is particularly the case for large and dense particle clusters where there is essentially no effect of size distribution broadening at all. For smaller and more dilute particle clusters, the effect of distribution broadening is clear but still not dominant.

## 1 Introduction

Many industrial processes, such as e.g. pulverized coal or biomass combustors, fluidized bed reactors or entrained flow reactors rely on reacting particles. In order to fully understand these systems, an understanding of the chemical

reactions together with the heat transport to and from the particles is crucial. In most cases, convective and conductive heat transfer between the particles and the gas must be considered. For high temperatures, radiative heat transfer should also be taken into account. Here one can think of both particle-fluid interactions, particle-wall interactions and particle-to-particle interactions. In the work reported here, the importance of particle-to-particle radiation is discussed.

Qiao et al. [4] studied char gasification in a well-stirred reactor using a detailed multi-physics model. They applied global chemical kinetics for the heterogeneous reactions and GRI-Mech 1.2 for the homogeneous reactions. In their work the particles were not resolved by a grid, but gradients were taken into account e.g. by utilizing boundary layer theories. Account was made for the effect of a cloud of particles on the fluid, but the cloud effect did not take into account the radiative exchange between the particles.

Mitchell et al. [6] resolved one single char particle using a spherically symmetric one dimensional discretization. A six-step adsorption-desorption heterogeneous reaction mechanism is then used to evolve the char burning rate, temperature, diameter, apparent density and specific surface area as a function of time. Since the reacting particle is fully resolved by the computational grid, the results are used to study how well the effectiveness factor calculated using the Thiele modulus replicate the results from their DNS. In this work, only radiative exchange between the particle and the surrounding walls, which are kept at a constant temperature, was included.

In a recent paper by Hecht et al. [7], the authors use the SKIPPY code to study the effect of gasification reactions on oxy-fuel combustion of pulverized coal. They found that the gasification reactions reduce the particle temperature significantly, and thus also the char oxidation rate. The

---

N. E. L. Haugen (✉)  
SINTEF Energy Research, 7465 Trondheim, Norway  
e-mail: nils.e.haugen@sintef.no

N. E. L. Haugen  
Department of Energy and Process Engineering, NTNU,  
Trondheim, Norway

R. E. Mitchell  
Department of Mechanical Engineering, Stanford University,  
Stanford, CA 94305, USA

overall char conversion rate was slightly increased though, due to the combined effect of the oxidation and gasification reactions. The SKIPPY code is similar to the code of Mitchell et al. [6] in that only radiative exchange between the particle and the surrounding walls is taken into account, and that it resolves the particle through a spherical symmetric discretization. The main difference between the two codes is that SKIPPY is steady state (i.e. not transient in time), while the code of Mitchell evolves the solution with time.

When performing CFD simulations, particle radiation is often included and found to be important [1–3]. If, on the other hand, one does not perform a full CFD simulation but is rather interested in solving single particle physics and chemistry in high detail one often neglects, or partly neglects, radiation. In such cases radiation may not be considered at all, or if it is taken into account, only particle-wall radiation [4–7] or particle-fluid radiation [8] is considered. The primary aim of this paper is to obtain a realistic description for the particle radiation transfer, including both particle-to-wall and particle-to-particle radiation, that can be used for high detail particle simulations. The secondary aim is to investigate the effect of particle size distribution broadening on radiative transfer.

In the current work, only geometric scattering is considered, and the analysis is limited to the case where the particles radiate like gray bodies and the gaseous environment between particles is transparent to radiation. The assumption of particles behaving like gray body radiators is expected to be valid for the char particles of interest here but not valid for particles with wavelength dependent absorption and scattering efficiencies, such as devolatilizing coal or biomass particles. The work of Solomon et al. [9] indicate that the spectral emittance of coal is dependent on rank, particle size and the extent of pyrolysis, approaching a highly absorbing gray body for chars, anthracites and large particles. Assuming the gaseous environment to be transparent to radiation is generally considered as a good approximation since both oxygen and nitrogen have very low absorptivities. Steam and carbon dioxide, on the other hand, are known to have somewhat higher absorptivities, which yields a higher opacity than for pure air. It is nevertheless quite common to assume the gaseous environment to be transparent to radiation even when steam and carbon dioxide are present. Considering only geometric scattering is valid since the particles have large size parameters, i.e.  $\xi = 2\pi r_p/\lambda > 5$  where  $\lambda$  is the wavelength of the radiation and  $r_p$  is the particle radius, such that Rayleigh and Mie scattering can be omitted.

Performing three dimensional CFD simulations of full gasifiers or combustors are very demanding. Due to the large CPU power required one often has to use very simplified chemical models, both for the homogeneous and

heterogeneous reactions. In many situations it is therefore better to simulate one single particle with high fidelity chemistry, and let this particle represent the “average” particle in the domain. With this simulation method one can easily do a large parameter scan over a range of different parameters with detailed chemical reactions. Such an “average particle” simulation will not yield detailed information of geometrical features in any application. Instead it will yield qualitative trends, using accurate chemical kinetics, for a range of parameters in “typical” conditions relevant for the application of interest. Traditionally, the particle cooling term used for such single particle simulations of a cloud of particles has been given by [4, 6]

$$Q = A_p(q_p - E_a q_w) \quad (1)$$

where  $q_p$  and  $q_w$  are the thermal radiation from the particle and the wall, respectively. It is evident from this that inter-particle radiation is neglected, which may not be a good assumption for many applications. A description of a particle cooling term that does include inter-particle radiation for this kind of simulation tool does not exist in the open literature. The main objective of the current work is therefore to extend the above radiative cooling term to also take into account inter-particle radiation.

## 2 Radiation in a cloud of particles

Consider a cloud of hot particles embedded in a radiatively transparent gas and enclosed within a confinement. This could for example resemble the situation in an entrained flow gasifier. If the radiative flux absorbed by a particle is  $F_a$  and the flux absorbed by a replacement blackbody particle having the same size and temperature is  $F_{bb}$ , then an absorption efficiency factor for the particle can be defined as  $E_a = F_a/F_{bb}$ , which is a measure of the efficiency of the particle as an absorber compared to that of a blackbody.

A ray of radiation incident on a large particle will either be absorbed or reflected by the particle surface. Since the total cross section of a particle with radius  $r_p$  is  $A_p = \pi r_p^2$ , the absorption cross section must be  $A_a = E_a A_p$  given that a fraction  $E_a$  of all the radiation incident on the particle is absorbed. Since radiation is either absorbed or reflected the scattering cross section of the particle must be  $A_s = A_p - A_a = (1 - E_a)A_p$ . A scattering efficiency factor is defined, analogously to the absorption efficiency factor, as the fraction of incident radiation that is scattered by the particle surface  $E_s = A_s/A_p$ , which then yields  $E_s + E_a = 1$ . For the large particles of interest, the scattering efficiency factor equals the reflectivity of the particle surface while the absorption efficiency factor equals the absorptivity of the particle surface. In all of the following the scattering efficiency factor of the particles is assumed

to be much smaller than the absorption efficiency factor such that the effect of scattered radiation from the particles can be neglected.

The extinction coefficient is a measure of how easily a ray of radiation penetrates a given medium without being absorbed. Let a large number of small particles be embedded in the fluid such that the number density of the particles with radius between  $r_p$  and  $r_p + dr_p$  is  $n(r_p) dr_p$ . Here, and in all the following, the particle number density is assumed to be homogeneous throughout the domain. If the particles are treated as diffuse gray bodies with zero scattering coefficients, a ray of radiation emitted from the source at  $r = 0$  may be absorbed by the particles. The probability of extinction depends on the number density of particles, the projected particle surface area and the length of travel. Following the approach of Siegel and Howell [10], the extinction coefficient is composed of two parts, a contribution from absorption and one from scattering. As such, the extinction coefficient,  $K$ , of the medium due to the embedded particles is given by

$$K = \int_{r_p=0}^{\infty} (E_a + E_s)n(r_p)\pi r_p^2 dr_p = \int_{r_p=0}^{\infty} n(r_p)\pi r_p^2 dr_p. \quad (2)$$

Let's now assume a Gaussian particle size distribution given by

$$n(r_p) = \frac{n_p}{\sigma_p\sqrt{\pi}} \exp\left(-\left(\frac{r_p - \bar{r}_p}{\sigma_p}\right)^2\right), \quad (3)$$

where  $n_p$  is the total particle number density,  $\bar{r}_p$  is the mean particle radius and  $\sigma_p$  is the width of the particle size distribution. It is convenient to define the distribution width as a fraction  $\gamma_p$  of the mean particle radius  $\bar{r}_p$ , i.e.  $\sigma_p = \bar{r}_p\gamma_p$ . Employing this in Eq. (3), and using the result in Eq. (2) yields the following expression for the extinction coefficient

$$K = \pi n_p \bar{r}_p^2 \left[ 1 + \frac{\gamma_p}{\sqrt{\pi}} + \frac{\gamma_p^2}{2} \right]. \quad (4)$$

The equation of radiative transfer, which describes the change in spectral radiative intensity with  $s$  around the wavelength  $\lambda$  in the solid angle  $d\omega_i$  about the direction of  $s$ , is given by [10]

$$\frac{dI_\lambda(\lambda, s)}{ds} = -a_\lambda I_\lambda(\lambda, s) + a_\lambda I_{\lambda,b}(\lambda, s) - \sigma_\lambda I_\lambda(\lambda, s) + \frac{\sigma_\lambda}{4\pi} \int_{\omega_i=0}^{4\pi} I_\lambda(\lambda, s, \omega_i) \Phi(\lambda, \omega, \omega_i) d\omega_i, \quad (5)$$

where  $\Phi$  is the phase function for scattering,  $I_{\lambda,b}$  is the spectral intensity from a blackbody and  $a_\lambda$  and  $\sigma_\lambda$  are the

spectral absorption and scattering coefficients, respectively. For a medium in which only absorption is important, and where the absorption coefficient is assumed to be constant for all wavelengths, the equation of radiative transfer reduces to

$$\frac{dI_\lambda(\lambda, s)}{ds} = -KI_\lambda(\lambda, s) + aI_{\lambda,b}(\lambda, s). \quad (6)$$

By neglecting emission along the path the spectral intensity of radiation after traveling a distance  $s$  into a medium is then found by integration of Eq. (6) to be

$$I_\lambda(\lambda, s) = I_\lambda(\lambda, 0)e^{-Ks}. \quad (7)$$

Here  $I_\lambda(\lambda, 0)$  is the intensity at the beginning of the path, the spectral intensity leaving a char particle, which is assumed to be a gray body emitter. For such radiation, the total intensity at a distance  $s$  from the particle is found by integrating over all wavelengths

$$I(r) = \int_{\lambda=0}^{\infty} I_\lambda(\lambda, s) d\lambda = \frac{\varepsilon_p \sigma T_p^4}{\pi} e^{-Ks}. \quad (8)$$

Here,  $\varepsilon_p$  is the particle emissivity,  $\sigma$  is Stefan-Boltzmann constant and  $T_p$  is the particle temperature. Particle scattering has been neglected since for most relevant applications  $E_a \gg E_s$ . Later in the paper, the emission from each particle will be included through an integration over spherical shells of increasing radius instead of through a direct inclusion in the equation of radiative transfer. This does not result in any loss of generality and is done in order to simplify the calculations.

The radiant energy  $d^2Qd\lambda$  per unit time in the small wavelength interval  $d\lambda$  centered around  $\lambda$  that is incident on a surface element  $dA$  and originates from a surface element  $dA_e$  on the surface of a particle having a center a distance  $r$  away from  $dA$  is given by [10]

$$d^2Qd\lambda = I_\lambda(\lambda, r) d\omega_e \cos \theta_e dA_e d\lambda \quad (9)$$

where  $d\omega_e$  is the solid angle subtended by  $dA$  when viewed from  $dA_e$  and is given by

$$d\omega_e = \frac{\cos \theta dA}{s^2}. \quad (10)$$

Here  $s$  is the distance between the differential elements  $dA$  and  $dA_e$  and  $\theta_e$  and  $\theta$  are the angles between the straight line connecting  $dA$  and  $dA_e$  and the normal to  $dA_e$  ( $\mathbf{n}_e$ ) and  $dA$  ( $\mathbf{n}$ ), respectively. Shown in Fig. 1 is a schematic view of the variables. Due to the curvature of the particle surface the distance between  $dA$  and  $dA_e$  will generally be slightly different from  $r$  and is denoted  $s$ .

The total energy  $dQ$  from the particle incident on  $dA$  per time unit is found by integrating over all wavelengths and over the entire surface,  $S_p$ , of the particle;

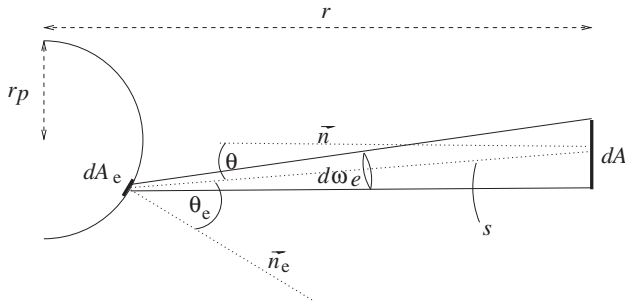


Fig. 1 Schematic of the variables used

$$dQ = \int_{S_p} \int_{\lambda=0}^{\infty} I_{\lambda}(\lambda, s) \frac{\cos \theta dA}{s^2} \cos \theta_e d\lambda dA_e \tag{11}$$

where  $s$  will vary with  $dA_e$  due to the curvature of the particle surface. By assuming that  $r_p \ll r$ , it follows that  $s \rightarrow r$  and that  $\theta$  becomes the angle between  $\mathbf{n}$  and the line connecting the center of the particle and  $dA$ . Now, by using Eq. (8), it can be found that

$$dQ = \int_{\lambda=0}^{\infty} I_{\lambda}(\lambda, r) \frac{\pi r_p^2}{r^2} \cos \theta dA d\lambda = \sigma T_p^4 \varepsilon_p e^{-Kr} \left(\frac{r_p}{r}\right)^2 \cos \theta dA. \tag{12}$$

The flux at  $dA$  due to radiation from the entire particle is now

$$q = \frac{dQ}{dA} = q_p e^{-Kr} \left(\frac{r_p}{r}\right)^2 \cos \theta \tag{13}$$

where the radiative flux emitted from the surface of a particle is

$$q_p = \sigma T_p^4 \varepsilon_p. \tag{14}$$

Assume now that  $dA$  corresponds to the projected surface area of some particle  $\mathbf{p}_c$  with radius  $r_c$  and external surface area  $A_p = 4\pi r_c^2$ . The total emission on  $\mathbf{p}_c$  is then  $q dA = q \pi r_c^2$ , while  $\theta = 0$ , such that the mean flux  $\bar{q}$  onto the surface of  $\mathbf{p}_c$  due to a particle with radius  $r_p$  placed a distance  $r$  away from  $\mathbf{p}_c$  is

$$\bar{q} = \frac{\pi r_c^2 q}{A_p} = \frac{1}{4} q_p e^{-Kr} \left(\frac{r_p}{r}\right)^2. \tag{15}$$

### 3 Solid–solid radiation

#### 3.1 Particle–wall radiation

Let's now assume that we are in a spherical confinement with radius  $R$ . The non-dimensional number  $\tau = RK$  is the

optical thickness. In the case with negligible optical thickness (i.e.  $\tau \rightarrow 0$ ) the total radiative flux incident on the confinement walls due to the combined radiation power from all the particles inside the confinement is

$$\lim_{\tau \rightarrow 0} q_{pp-w} = \frac{1}{A_w} \lim_{\tau \rightarrow 0} Q_{pp-w}, \tag{16}$$

where  $A_w = 4\pi R^2$  is the total area of the confinement walls and  $Q_{pp-w}$  is the total radiative power incident on the confinement walls. The assumption of zero optical thickness implies that the total radiative power emitted from all the particles,  $Q_{pp}$ , equals the total radiative power incident on the walls, i.e.

$$\lim_{\tau \rightarrow 0} Q_{pp-w} = Q_{pp}. \tag{17}$$

The emitted power from all the particles must equal the product of the number of particles and the radiative power from each particle integrated over all particles radii, such that

$$Q_{pp} = \int_{r_p=0}^{\infty} Q_p(r_p) \cdot N(r_p) dr_p, \tag{18}$$

where  $Q_p(r_p) = 4\pi r_p^2 q_p$  is the radiative power emitted from the surface of a particle of radius  $r_p$  and  $N(r_p) dr_p = \frac{4}{3} \pi R^3 n(r_p) dr_p$  is the number of particles in the confinement with radii between  $r_p$  and  $r_p + dr_p$ . Combining Eqs (16)–(18) yields, in the case of negligible optical thickness, the following expression for the total radiative flux incident on the confinement wall due to the radiation from all particles:

$$\lim_{\tau \rightarrow 0} q_{pp-w} = \frac{1}{4\pi R^2} \int_{r_p=0}^{\infty} 4\pi r_p^2 q_p \cdot \frac{4}{3} \pi R^3 n(r_p) dr_p = \frac{4}{3} \tau q_p. \tag{19}$$

In the case of non-negligible optical thickness, the equation for the total radiative flux on the confinement walls is more complicated. Booth [11] theoretically considered a cloud of radiating particles in order to determine an effective emissivity that could be used to describe radiation from the particle cloud. He showed that by assuming an absorption efficiency factor of unity, the radiative emission incident on the walls surrounding the cloud, due to the enclosed particle cloud, is

$$q_{pp-w} = q_p \varepsilon_{\text{eff}}(\tau) \tag{20}$$

where

$$\varepsilon_{\text{eff}}(\tau) = \left[ 1 - \frac{1}{2\tau^2} + e^{-2\tau} \left( \frac{1}{\tau} + \frac{1}{2\tau^2} \right) \right]. \tag{21}$$

From this it is clear that the cloud of particles within the enclosure may be considered as a single object with radius  $R$ , temperature  $T_p$  and an effective emissivity  $\varepsilon_{\text{eff}}(\tau)$ . For

very small values of the optical thickness, it can be shown by Taylor expansion that

$$\lim_{\tau \rightarrow 0} \varepsilon_{\text{eff}}(\tau) = \frac{4\tau}{3}. \tag{22}$$

such that in the case of vanishing  $\tau$ , Eq. (20) reduces to Eq. (19), as expected.

#### 4 Particle energy equation

The energy conservation equation for a particle is given by

$$\frac{dT_p}{dt} = \frac{1}{m_p c_{p,p}} (Q_{\text{con}} + Q_{\text{rad}} + Q_{\text{other}}) \tag{23}$$

where  $T_p$  is the particle temperature,  $m_p$  is the particle mass,  $c_{p,p}$  is the specific heat capacity of the particle and  $Q_{\text{rad}}$  and  $Q_{\text{con}}$  represent the heating/cooling due to radiation and convection and conduction, respectively, and  $Q_{\text{other}}$  represent any other heating term that could be due to e.g. chemical reactions. Due to the high thermal conductivities and small radii of the particles of interest (char particles with  $r_p \sim 50 \mu\text{m}$ ), the Biot number is significantly less than unity, suggesting that the particle temperature is uniform throughout the particle. For significantly larger particles, with large Biot numbers, the proposed approach is not valid. The effect of radiative absorption may be very important for the temperature evolution of a particle, but exactly how important the absorption is will depend on the position of the particle within the particle cluster.

##### 4.1 Particle in the center of the enclosure

At the end of Sect. 2,  $\bar{q}(r_p, r)$  was defined as the mean flux at the surface of a particle due to the radiative emission from another particle with radius  $r_p$  a distance  $r$  away. The total flux received by a particle in the center of the enclosure,  $q_{pp-pc}$ , is now found by integrating  $\bar{q}(r_p, r)$  over all its surrounding particles. This means by integration over all particle volumes  $dV(r)$  and number densities  $dn(r_p)$ , i.e.

$$q_{pp-pc} = \int_{r_p=0}^{\infty} \int_{r=0}^R \bar{q}(r_p, r) dV(r) dn(r_p). \tag{24}$$

Since the volume of a spherical shell with thickness  $dr$  and radius  $r$  is  $dV(r) = 4\pi r^2 dr$ , and since the particle number density of particles having radii between  $r_p$  and  $r_p + dr_p$  is given by  $dn(r_p) = n(r_p) dr_p$ , the above equation becomes

$$q_{pp-pc} = \int_{r_p=0}^{\infty} \int_{r=0}^R 4\pi r^2 \bar{q}(r_p, r) n(r_p) dr dr_p = q_p (1 - e^{-\tau}) \tag{25}$$

when Eq. (15) is used for  $\bar{q}(r_p, r)$  and all particles are assumed to behave alike.

The flux of radiation from the enclosure walls incident on the particle in the center of the enclosure is

$$q_{w-pc} = (q_w + q_{w,r}) e^{-\tau} \tag{26}$$

where the radiative flux emitted from a diffuse gray body wall is

$$q_w = \varepsilon_w \sigma T_w^4 \tag{27}$$

and where the wall temperature and emissivity are given by  $T_w$  and  $\varepsilon_w$ , respectively. The radiative flux reflected off the wall,  $q_{w,r}$ , is given by the product of the radiative flux received from the particles and the reflectivity of the wall,  $\rho_w$ , i.e.:

$$q_{w,r} = \rho_w q_{pp-w}, \tag{28}$$

where  $q_{pp-w}$  is given by Eq. (20).

The radiative cooling of the particle in the center of the particle cloud,  $Q_{\text{rad,centr}}$ , is found by integrating the difference between the absorbed,  $E_a q_{pc,rec}$ , and the emitted,  $q_{pc,em}$ , radiative flux over the particle surface of the particle in the center of the particle cloud. The radiative flux emitted from the particle is given by  $q_{pc,em} = q_p$ , where  $q_p$  is found from Eq. (14), while the radiative flux received by the particle in the center of the cloud is given by the sum of the radiation received from the rest of the particle cloud and the wall, i.e.  $q_{pc,rec} = q_{w-pc} + q_{pp-pc}$ . Since the radiation in the center of the spherical cloud is isotropic, such that the integration over the particle surface can be replaced by the external particle surface area, this yields

$$Q_{\text{rad,centr}} = A_p (E_a q_{pc,rec} - q_{pc,em}), \tag{29}$$

where  $A_p = 4\pi r_p^2$  is the surface area of the particle. By employing Eqs. (25) and (26) and Eq. (29) the radiative cooling term of the particle in the center of the particle cloud becomes

$$Q_{\text{rad,centr}} = A_p (q_p [E_a (1 + e^{-\tau} (\rho_w \varepsilon_{\text{eff}} - 1)) - 1] + q_w E_a e^{-\tau}). \tag{30}$$

##### 4.2 Particle near the enclosure

A particle that is very near the enclosure walls will receive the radiative flux from all the other particles on one side while on the other side it will receive the radiative flux from the wall. The mean flux received is therefore  $q_{pR} = \frac{1}{2} (q_{pp-w} + q_w + q_{w,r})$  which yields

$$Q_{\text{rad,R}} = A_p [q_{pR} E_a - q_p] = \frac{A_p E_a}{2} [q_p \varepsilon_{\text{eff}}(\tau) (1 + \rho_w) + q_w] - A_p q_p. \tag{31}$$

### 4.3 The “mean” particle

In the following, a radiation term that on average will give the correct net radiative outflow from the “average” particle in the cloud, is proposed. The radiative term,  $Q_{\text{rad,aver}}$ , is defined as the net radiative flux from the entire particle cloud divided by the total number of particles in the cloud.

Since the gas is assumed not to take part in the radiative exchange, and the container wall is assumed to be opaque, the only two radiatively active media are the particle cloud and the container wall. The net radiative heating of the wall,  $E_{w,\text{net}}$ , equals the radiation absorbed by the wall from the particles, minus the radiation from the wall which is absorbed by the particles. Similarly the net radiative heating of the particles,  $E_{p,\text{net}}$ , equals the radiation absorbed by the particles from the wall, minus the radiation from the particles which is absorbed by the wall. Based on this a radiative balance equation between the two media can be set up:

$$E_{w,\text{net}} = -E_{p,\text{net}}. \tag{32}$$

Note that the above equation does *not* consider the energy balance of the system, it only states that the *net radiative* heating of the wall and the particles must sum to zero.

Since all surfaces are assumed to be gray and diffuse and since all particles are assumed to behave alike, the absorptivity of the particle cloud equals the effective emissivity found in Eq. (21),  $\varepsilon_{\text{eff}}(\tau)$ , such that the total thermal emission from the wall incident on the particle cloud is

$$E_{w-pp} = 4\pi R^2 q_w \varepsilon_{\text{eff}}(\tau). \tag{33}$$

The net radiative heating of the wall equals the radiative energy the wall absorbs from the particle cloud minus the radiative energy it emits as thermal radiation, i.e.

$$E_{w,\text{net}} = E_{pp-w} - E_{w-pp}, \tag{34}$$

when  $E_{pp-w} = 4\pi R^2 q_{pp-w} \alpha_w$  and  $\alpha_w = 1 - \rho_w$  is the absorptivity of the wall. By using Eqs. (20), (33) and (34), it is found that the net radiative heating of the wall is

$$E_{w,\text{net}} = 4\pi R^2 \varepsilon_{\text{eff}}(\tau) (\alpha_w q_p - q_w). \tag{35}$$

In the beginning of this subsection the radiative cooling term of the *average* particle was defined as the net radiative flux from the entire particle cloud divided by the total number of particles in the cloud. This means that the integral of  $Q_{\text{rad,aver}}$  over all particles in the cloud must equal the negative of the net radiative heating of the particle cloud. From this it is now clear that  $Q_{\text{rad,aver}}$  is found by

$$E_{p,\text{net}} = -\frac{4}{3}\pi R^3 \int_{r_p=0}^{\infty} Q_{\text{rad,aver}}(r_p) n(r_p) dr_p \tag{36}$$

when the cloud volume is given by  $4\pi R^3/3$ . When using the relation

$$Q_{\text{rad,aver}} = A_p q_{\text{rad,aver}} = 4\pi r_p^2 q_{\text{rad,aver}}, \tag{37}$$

together with Eq. (2), the integral in Eq. (36) is found to be

$$\begin{aligned} \int_{r_p=0}^{\infty} Q_{\text{rad,aver}}(r_p) n(r_p) dr_p &= 4q_{\text{rad,aver}} \int_{r_p=0}^{\infty} n(r_p) \pi r_p^2 dr_p \\ &= 4q_{\text{rad,aver}} K. \end{aligned} \tag{38}$$

Combining Eqs. (38) and (36) to eliminate the integral, and inserting the resulting expression for  $q_{\text{rad,aver}}$  into Eq. (37) yields

$$Q_{\text{rad,aver}} = -\frac{3A_p E_{p,\text{net}}}{16K\pi R^3}. \tag{39}$$

Introducing Eq. (32) and Eq. (35) into the above results in the following expression for the net radiative outflow from the “average” particle

$$Q_{\text{rad,aver}} = \frac{3\varepsilon_{\text{eff}}(\tau)A_p}{4\tau} (\alpha_w q_p - q_w) \tag{40}$$

since the optical depth of the enclosure is given by  $\tau = KR$ . We propose that the use of this average radiative loss better approximates the radiative loss of a particle in a particle cloud of particles compared to previous methods neglecting the inter-particle radiation (Eq. 1). The proposed method is *not* applicable for CFD simulations of entire combustors or reactors, where ordinary radiation models like e.g. the discrete ordinates method or similar can be used. Instead the proposed equation is particularly useful when one is not able to explicitly simulate the radiation from the full particle cloud but instead focus on a single particle that is supposed to represent all the other particles. This is the case in the work of e.g. Qiao et al. [4] and Mitchell et al. [6]. The proposed radiative cooling term will also be applicable when Direct Numerical Simulations (DNS) are being used to simulate a very small sub domain of a real application.<sup>1</sup> This is particularly so due to the small volumes realizable in a DNS simulations, which requires a radiation model that does not need access to the particles outside the small simulation volume.

<sup>1</sup> In a DNS all spatial and temporal scales of the fluid are fully resolved, hence the fundamental fluid equations can be solved without any modeling of the fluid equations. This yields very accurate and reliable results, but it requires huge computational resources. With a DNS, even on the worlds largest computers, only small physical domains can therefore be considered. Note that for a typical DNS the embedded particles are assumed to be very small, and hence are not resolved. This means that even though the fluid itself can be solved without any modeling, the fluid-particle coupling must be based on models, such as e.g. the Stokesian drag law.

### 5 Importance of inter-particle radiation for some relevant configurations

In the current section, a few examples of particle sizes and number densities as found in the literature will be examined to investigate the importance of inter-particle radiation for some application. The cases studied have been kept simple in order to more easily isolate the effect of particle number density, particle size and size of the enclosure on the particle cooling. In Table 1, particle data found in the literature is presented. Case A is from a coal gasification reactor, while the data of [12] are from two different locations in a pulverized coal furnace: the lower part of the furnace close to the burners (Case B) and the upper part of the furnace, downstream of the burners, where temperatures are relatively low (Case C).

In the left panel of Fig. 2 the optical thickness is plotted as a function of the enclosure radius  $R$  for all three cases listed in Table 1. The inter-particle radiation is important when  $\tau \gtrsim 1$ , which is marked with a horizontal dotted line in the figure, so for case C, inter-particle radiation starts to have a significant effect for  $R \gtrsim 5$  m. For case A and B inter-particle radiation becomes important when the radius of the domain exceeds about 10 and 30 cm, respectively.


In the central panel, the absorption efficiency factor of the particle cloud is shown as a function of enclosure radius. For case A and B the emissivity is seen to approach unity for enclosure radii of 1 m and 3 m, respectively. This means that for radii above this the particle cloud essentially behaves as a solid body with temperature  $T_p$  and radius  $R$ .

**Table 1** Mean particle sizes and number densities from previous studies [4, 12]

Case	References	$n_p$ (m <sup>-3</sup> )	$r_p$ (m)	$K$ (m <sup>-1</sup> )
A	Qiao et al. [4]	$1 \times 10^9$	$5 \times 10^{-5}$	8
B	Park et al. [12]	$5 \times 10^9$	$1.25 \times 10^{-5}$	2.5
C	Park et al. [12]	$4 \times 10^8$	$1.25 \times 10^{-5}$	0.2

The listed extinction coefficients has been calculated from Eq. (4)

**Fig. 2** Optical depth,  $\tau$ , (left), effective emissivity of the particle cloud,  $\epsilon_{\text{eff}}(\tau)$ , (middle) and normalized net radiative cooling of the “average” particle,  $Q_{\text{rad,aver}}/Q_{\text{rad,ref}}$  (right). All results are for a single particle size, i.e.  $\sigma_p = 0$ , where  $r_p$  is given in Table 1. Particle and wall temperatures have been set to 1,200 and 500 K, respectively

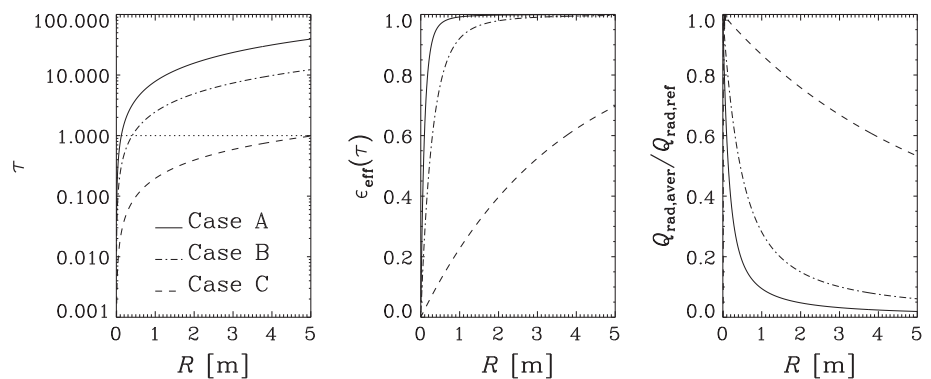

The same is not true for case C, which for all radii considered behaves like a cloud of diluted radiating particles.

In the right panel  $Q_{\text{rad,aver}}$  normalized by a reference cooling term  $Q_{\text{rad,ref}}$  is shown. Here the reference cooling term is obtained by neglecting particle-particle radiation, i.e.


$$Q_{\text{rad,ref}} = A_p(q_p - E_a q_w). \tag{41}$$

From this it is clear that for large and/or dense particle clouds, the average radiative cooling for the particles is much weaker than when inter-particle radiation is neglected. For example, for case A with an enclosure radius of 2 m the reference cooling term is a factor 20 stronger than the cooling term for the average particle.

In Fig. 3 the radiative cooling of a particle normalized by the reference cooling given by Eq. (41) is plotted as a function of enclosure radius for different particle positions within the enclosure. The different position are (1) the center of the domain, given by Eq. (30) (solid line), (2) the periphery, given by Eq. (31) (dotted line) and (3) the position of the average particle, given by Eq. (40), (dashed line). It is clearly seen that the cooling is largest at the periphery, but that the difference is much less for case C where the particle number density is much smaller. Furthermore it is interesting to note that the average cooling approaches zero even for an enclosure radius of 5 m for case A and that the central particles of the same case experience near zero cooling even for enclosure radii less than a meter.

The grey lines in Fig. 3 represent a distribution width of  $\sigma_p = 0.2r_p$  while the black lines represent  $\sigma_p = 0$ . As can be seen, the radiation term is not very sensitive to the width of the particle size distribution even for a width as wide as 20 % of the mean particle radius. The effect of the broader particle size distribution is largest for small optical depths, as in Case C, but even here it is rather small.

Simulations of the gasification process presented in a paper by Qiao et al. [4] has been performed in order to emphasize the importance of including inter-particle radiation for dense clouds of particles. The numerical code

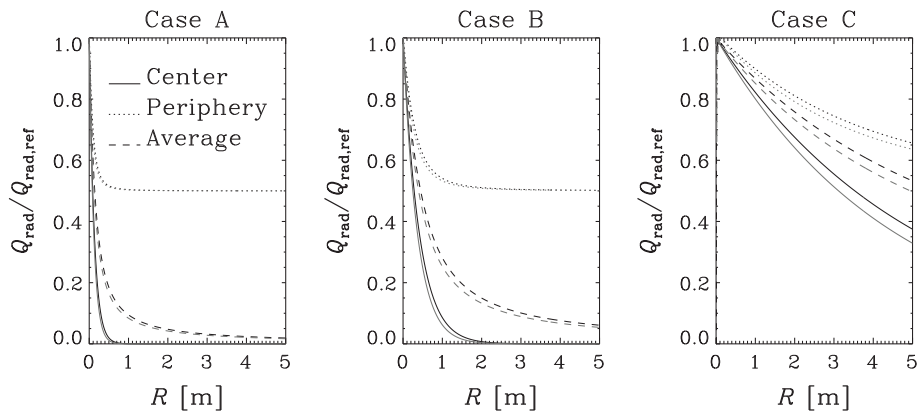

**Fig. 3** Here  $Q_{\text{rad}}/Q_{\text{rad,ref}}$  is plotted as a function of the radius of the enclosure for particles positioned in the center and on the periphery of the domain together with the value for the average of all the particles. The three different panes represent the three different cases

listed in Table 1. The grey lines correspond to a particle distribution width  $\sigma_p = \bar{r}_p \gamma_p$  where  $\gamma_p = 0.2$ , while for the black lines  $\gamma_p = 0$ . Particle and wall temperatures have been set to 1,200 and 500 K, respectively

used to perform the simulations was comparable to the code used in the above mentioned paper. Tests were done both with the same radiative cooling term as used by Qiao et al. (Eq. 41), which neglects inter-particle radiation, and with the particle cooling term as proposed in this work (Eq. 40), which includes inter-particle radiation. Compared to when inter-particle radiation is included, as given by Eq. (40), the time required to reach full conversion of the char is 47 % longer when inter-particle radiation is neglected (Eq. 41).

Analytical expressions for geometries of the confinement walls other than the spherical geometry considered in this work do not exist. It can be shown [13], however, that other geometries like cylinders or cubes give trends for the heat transfer that are similar to what is found for spherical geometries. In particular it can be shown by numerical integration [13, 14] that for cubes and cylinders having aspect ratios near unity, the expressions developed for spherical geometries give comparable results for the net heat transfer to the enclosure walls. It is therefore assumed to be a good approximation to use the expressions developed here also for real applications such as furnaces.

## 6 Conclusion

The particle cooling due to radiation has been investigated in particle clusters of variable size. When neglecting the effect of scattering and assuming all particles to behave alike it is shown that the radiative particle cooling is very sensitive to where the particle is positioned within the particle cluster. Broadening the particle size distribution is found to just have a minor impact on the results presented.

Instead of the traditional particle cooling term often used for single particle simulations of particles in a cluster of

particles (Eq. 41) a new particle cooling term is proposed (Eq. 40) where the particle cooling is defined as the average particle cooling of all the particles. In contrast to Eq. (41), the new particle cooling term does include inter-particle radiation, which is found to be very important for the applications studied.

We claim that, compared to previous methods that neglect the inter-particle radiation, the use of the proposed radiative cooling term better approximates the radiative loss of a particle in a cloud of particles. The proposed method is applicable for simulations of *small sub-volumes* of gasifiers, pulverized coal combustors or any system where hot particle clouds exists. It is particularly useful when one is not interested in simulating the radiation from the full particle cloud but instead want focus on a single particle that represent all the other particles in the sub volume. Examples of such simulations are found in Qiao et al. [4] and Mitchell et al. [6].

**Acknowledgments** This work forms part of the CAMPS project supported by the Research Council of Norway (215707). The work has additionally been produced with support from the BIGCCS Centre, performed under the Norwegian research program Centres for Environment-friendly Energy Research (FME). The authors acknowledge the following partners for their contributions: Aker Solutions, ConocoPhillips, Gassco, Shell, Statoil, TOTAL, GDF SUEZ and the Research Council of Norway (193816/S60).

## References

1. Azad FH, Modest MF (1981) Combined radiation and convection in absorbing, emitting and anisotropically scattering gas-particle tube flow. *Int J Heat Mass Transf* 24:1681
2. Park JH, Baek SW, Kwon SJ (1998) Analysis of a gas-particle direct-contact heat exchanger with two-phase radiation effect. *Numer Heat Transf A* 33:701



3. Boutoub A, Ettouati H, Benticha H (2007) Radiative transfer effects of an axisymmetric particulate jet into a cylindrical pipe. *Heat Mass Transf* 43:613
4. Qiao L, Xu J, Sane A, Gore J (2012) Multiphysics modeling of carbon gasification processes in a well-stirred reactor with detailed gas-phase chemistry. *Combust Flame* 159:1693
5. Xu J, Qiao L (2012) Mathematical modeling of coal gasification processes in a well-stirred reactor: effects of devolatilization and moisture content. *Energy Fuels* 26:5759
6. Mitchell RE, Ma L, Kim B (2007) On the burning behavior of pulverized coal chars. *Combust Flame* 151:426
7. Hecht ES, Shaddix CR, Geier M, Molina A, Haynes BS (2012) Effect of CO<sub>2</sub> and steam gasification reactions on the oxy-combustion of pulverized coal char. *Combust Flame* 159:3437
8. Liu XJ, Zhang WR, Park TJ (2001) Modelling coal gasification in an entrained flow gasifier. *Combust Theory Model* 5:595
9. Solomon PR, Carangelo RM, Best PE, Markham JR, Hamblen DG (1988) Twenty-first symposium (international) on combustion vol 21, 437
10. Siegel R, Howell JR (1992) *Thermal radiation heat transfer*, 3rd edn. Taylor and Francis, Washington
11. Booth F (1949) On the radiation from transient light sources. *Proc Phys Soc A* 62:95
12. Park S, Kim HA, Ryu C, Yang W, Kim YJ, Seo S (2012) Effects of gas and particle emissions on wall radiative heat flux in oxy-fuel combustion. *J Mech Sci Technol* 26:1633
13. Field MA, Gill DW, Morgan BB, Hawksley PGW (1967) *Combustion of pulverized coal*. The British Coal Utilization Research Association, Surrey
14. Erkkü H (1959) D.Sc. Thesis in chemical engineering. MIT